

# MODULE 1

## Point-of-Use Filter Installation

There are two main types of faucet threading: **internal threads** (what plumbers call “female threads”) and **external threads** (“male threads”).



Internal (Female) Threads



External (Male) Threads

## What do I do if I have a PUR filter?

### What's in the Box

**Flow Directing Unit**

**Filter**

**1 PUR System**

**1 Filter Cartridge**

**4 Adapters and Washers**  
Choose the one that's right for your faucet

**Fittings**

**A** (all-metal adapter) External Threaded Faucets

**B** External Threaded Faucets

**C** Internal Threaded Faucets

**D** Internal Threaded Faucets

### Filter Installation Instructions

- 1** Twist top cover off.
- 2** Insert filter into the device. (Don't worry, the filter will fit loosely.)
- 3** Replace top cover.
- 4** Install the PUR device with 1-CLICK.


### Adapter Installation Instructions

- 1** Remove your original aerator and its washer. Use a rubber jar opener if aerator is difficult to remove.
- 2** Choose your new adapter to match your faucet threading. Be sure black rubber washer is inserted into the threaded end of adapter.
- 3** For external threaded faucets, try adapter A. If A doesn't fit, try adapter B. For internal threaded faucets, try adapter C. If C doesn't fit, try adapter D.


Finger-tighten your new adapter and washer to your faucet.

Before using the filter for the first time, flush cold water through the cartridge for 5 minutes.


# What do I do if I have a BRITA filter?

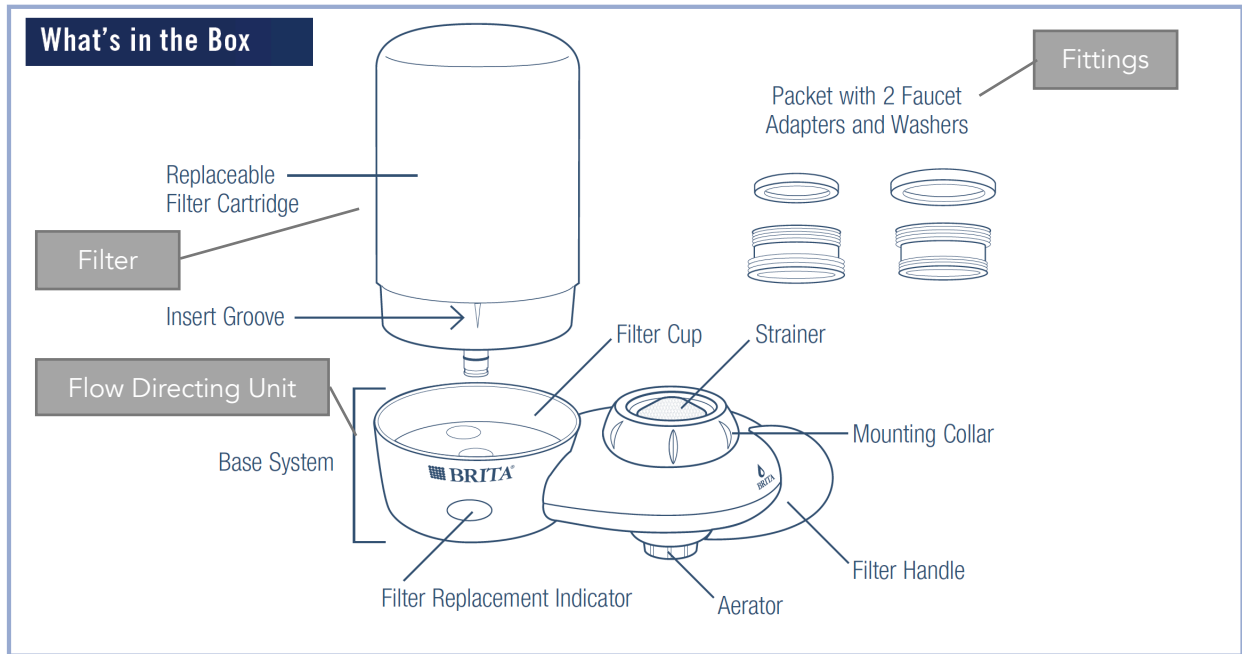

## Filter Installation Instructions

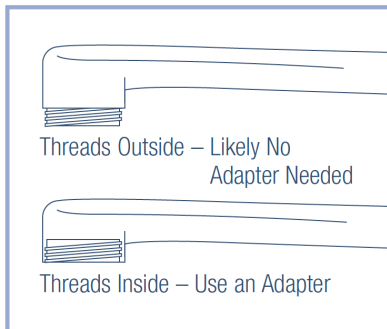



### Adapter Installation Instructions

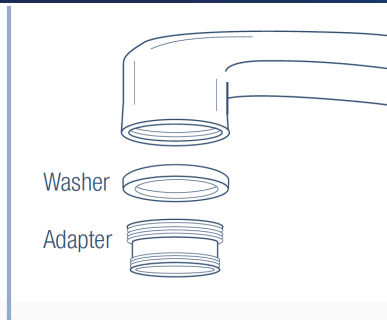

#### Attach Base System to the Faucet


Position the base system so that the filler cup is on the left side of your faucet and the filter replacement indicator is facing you. Twist the mounting collar onto the faucet and tighten by hand until snug. Make sure it is leveled, and don't force it to fit. **Do not tighten with pliers. Do not over-tighten.**

If you are having difficulty, rotate the base system backward and forward while further tightening the mounting collar.

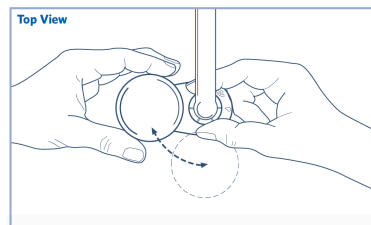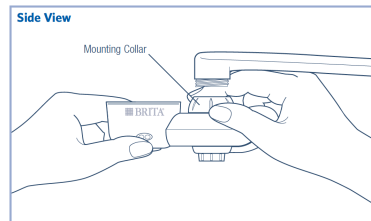

#### Attach Filter Cartridge to the Filter Cup

Support the bottom of the filter system with one hand. Align the insert groove on the lower part of the cartridge with the filter replacement indicator at the front of the filter cup. Insert the filter cartridge into the filter cup. Lightly pull the filter back out, making sure it is engaged. Do not force the filter cartridge into the system base. Inserting the new filter cartridge automatically resets and activates the filter replacement indicator.

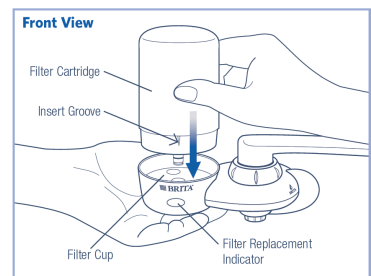

**Before using the filter for the first time, flush cold water through the cartridge for 5 minutes.**

# MODULE 2

## Using Point-of-Use Filters

When using the filter, only send **COLD WATER** through the filter cartridge.




PUR Instructions

<p><b>FILTERED WATER</b> Move handle to forward position to... Only draw filtered water from filter port. All other water is unfiltered.</p>			
<p><b>STREAM OF UNFILTERED WATER</b> Move handle to middle position to...</p>			
<p><b>SPRAY OF UNFILTERED WATER</b> Move handle to rear position to...</p>			

Brita Instructions

### How water flows through the filter:

When water is sent to the filter, it moves from the flow directing unit to the filter cartridge. Inside the filter cartridge, water moves radically inward through the filter fabric to the center of the filter carbon block. Filtered water flows down and out the center core channel of the filter cartridge, through the filter port.

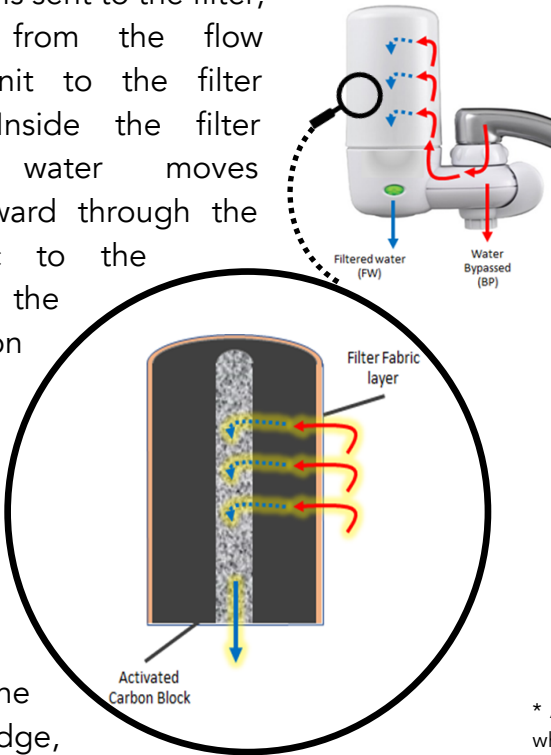

### Flushing Recommendation

It is recommended to flush filters prior to use and after long periods of inactivity (>8 hours) to reduce bacterial levels in filtered water.

- Greater than 8 hours of inactivity

  - Flush water through bypass until cold or 1-2 minutes
- Beginning of each use period\*

  - Flush water through filter cartridge for 15 seconds
- Use filter


  - Use water filter only with cold water\*\*

\* A use period is a period of frequent water use, such as when using filtered water while cooking or cleaning.  
 \*\* If hot water is sent through the filter cartridge, it is recommended to replace the cartridge.

# MODULE 3

## Point-of-Use Filter Device Maintenance & Cleaning

### BRITA



#### INDICATOR LIGHT



Flashing Green



Flashing Amber



Flashing Red

#### FILTER STATUS

##### Filter Working

When switched to the filtered Brita® water setting, the green light will flash to show your filter is working.

##### Change Filter Soon

When switched to the filtered Brita® water setting, the amber light will flash when your filter has 2 weeks or approximately 20 gallons/75 liters of life left. Your filter is working, but it has entered the **Replacement Warning Period** signaling that the filter will need to be replaced soon.

##### Change Filter Now

When switched to the filtered Brita® water setting, the red light will flash to indicate that your filter cartridge has reached the end of its life and needs to be replaced now.

If the filter replacement indicator appears solid red, it is time to replace the filter cartridge. To remove the old cartridge, turn water off, press the filter cartridge release button located at the back of the filter cup and pull the cartridge up to remove it. To insert a new cartridge, follow the directions in Module 1.

### PUR

Indicates filter status and guarantees you will always have safer and healthier filtered drinking water. Green light will flash 6 times as you begin to use the filter. Replacement of filter cartridge resets the light.

Filter change light changes color depending on how long filter has been in use or how much water has been filtered. Filter will reach end of life at 100+ gallons filtered or 90+ days of use.


The filter change light contains a non-replaceable battery. The battery will eventually stop working but the filter is still functional.



FILTER IS WORKING



CHANGE FILTER SOON



END OF FILTER LIFE

## Best Practices and Tips

Clean with soap and water. Make sure to thoroughly rinse the flow distribution unit before using again.

2. It is good practice to write the date of the installation with a permanent marker on each cartridge before installation.

Find more information:

Brita Filter: [https://www.brita.com/wp-content/uploads/023\\_BRT\\_CBI\\_FF-100\\_UsersGuide.pdf](https://www.brita.com/wp-content/uploads/023_BRT_CBI_FF-100_UsersGuide.pdf)

PUR Filter: [https://www.pur.com/pub/media/catalog/product/file/fm\\_om\\_pds\\_classic\\_nki\\_04sep19\\_2.pdf](https://www.pur.com/pub/media/catalog/product/file/fm_om_pds_classic_nki_04sep19_2.pdf)